

JOLLY

FUNCTIONS



- Weight indication by 4 digit 7 segments, height 20 mm
- 2 set-points with relay outputs, fully configurable by keyboard
- Zero and F.S. calibration programmable by keyboard


*Conditioning and display unit
for scales type SGC-70 and SGC-150*

TECHNICAL SPECIFICATION

Power supply	230 Vac 50/60 Hz, Pmax 5 VA
Visual indications	4 digit 7 segments display H= 20 mm Alarm Set-point 1: red LED Ø 3 mm Alarm Set-point 2: red LED Ø 3 mm
Power supply for load cells	5 Vdc/ 60 mA
Internal division	20.000
Display range	- 9999 / + 19.999
Measuring range	- 4 mV + 16,5 mV
Reading resolution	X1, X2, X5
Relay outputs	2 relay – 115 Vac/ 2 A
Housing	DIN box for wall mounting IP64 dim. 98x125x75 mm
Weight	700 g.
Reference standards and directives	CE

Data Sheet

OUTLINE

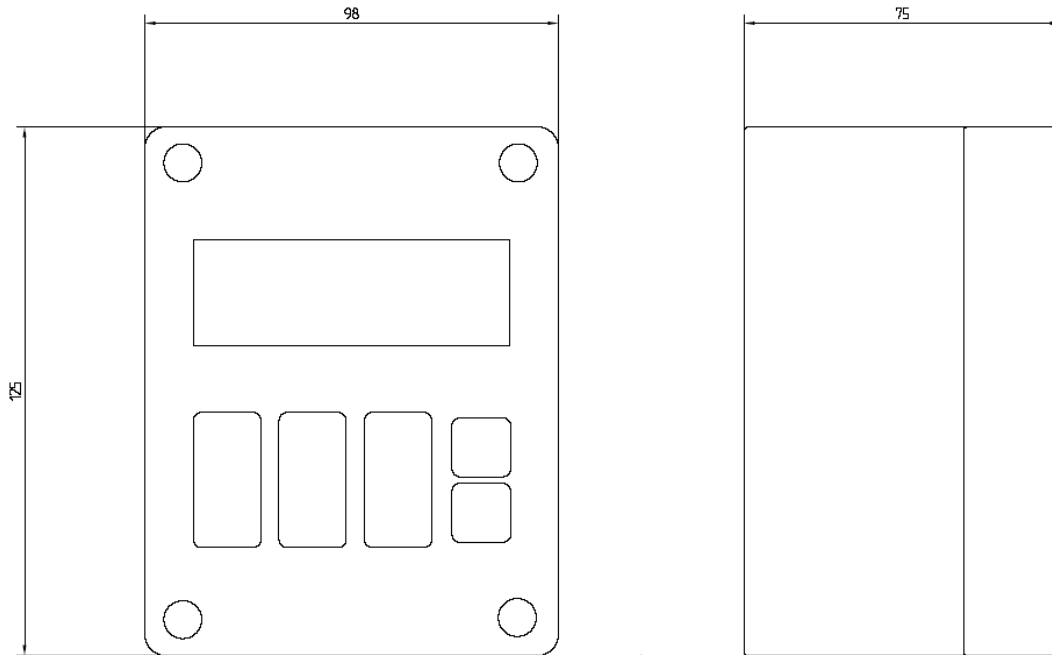

ORDERING INFORMATION

Code	Description
0008-03-002	Jolly: Conditioning and display unit for scales type SGC-70 and SGC-150