

WT 4-20

FUNCTIONS



- Active or loop powered 4-20 mA output



**4-20 mA output conditioning unit
for scales type SGC-70 and SGC-150**

TECHNICAL SPECIFICATION

Power supply	230 Vac or 24 Vac 50/60 Hz, Pmax 3 VA – for active output configuration only –
Visual indications	----
Power supply for load cells	4,5 Vcc nominal
Analog output	4-20 mA active or loop powered Range 0 – 70 Kg for SGC-70 Range 0 – 150 Kg for SGC-150
Load	200 Ω max
Housing	PVC, 4 modules for DIN rail mounting (EN 60715) in accordance with DIN 43380, dim. 71x90x58 mm
Weight	270 g
Operating temperature	0...65°C
Reference standard and directives	CE

Data Sheet

OUTLINE

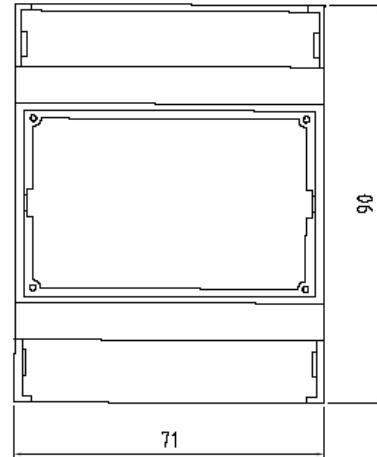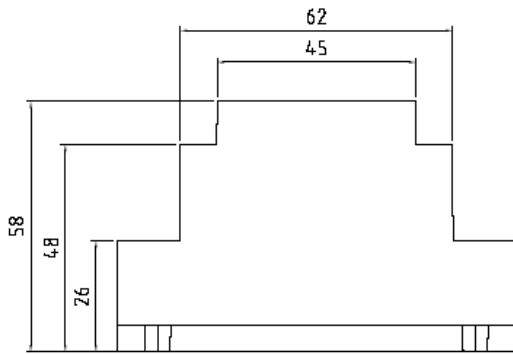

ORDERING INFORMATION

Code	Description
0008-02-001	WT 4-20: 4-20 mA output amplifier for scales type SGC-70 and SGC-150