

WEIGHT VISUAL DISPLAY UNIT



Weight display indicator for medical and industrial applications

Typical applications:

- Weighing system for N₂O and CO₂ in hospital
- Weighing system for Cl₂, C₂H₂ e CO₂ in industry


FUNCTIONS

- Programming by 6 buttons on front panel
- Indication on 9999 points
- Zero and calibration by push buttons
- Possibility to configure 2pcs. set-points with relay in output

TECHNICAL SPECIFICATION

Power supply	230 Vac 50/60 Hz, Pmax 5 VA
Visual indication	4 digit 7 segments display
Input	4-20 mA
Power supply for load cell	14 Vdc, 20 mA
Display range	-1999; 9999
Relay outputs	2pcs. relay - 250 Vac/ 5A
Operating temperature	-10°C / + 60 °C
Housing	External box IP40 Dim. 240x190x160 mm
Weight	1 Kg
Reference standards and directives	CE

OUTLINE

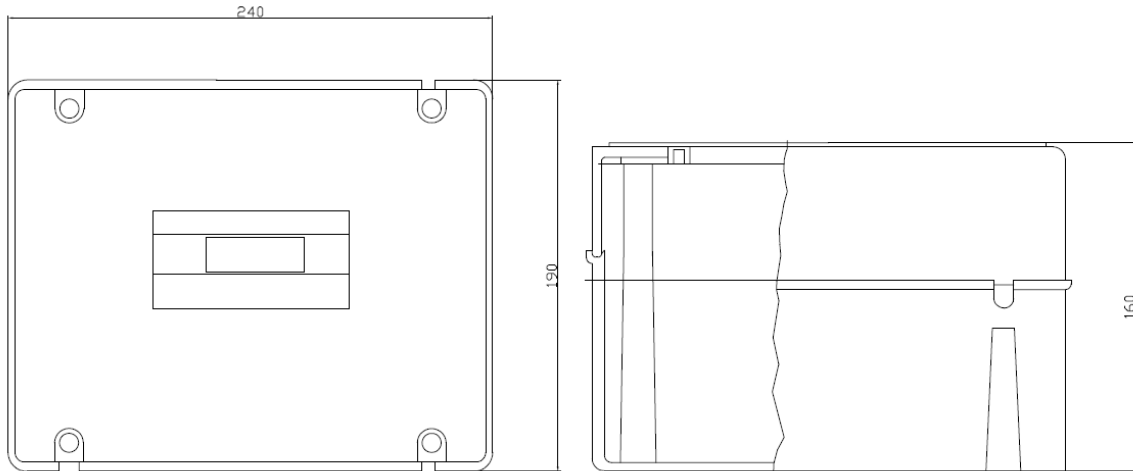

ORDERING INFORMATION

Code	Description
0008-03-010	Weight display indicator with 4-20mA input: Weight indicator for scales mod. SGC70/150LC4-20